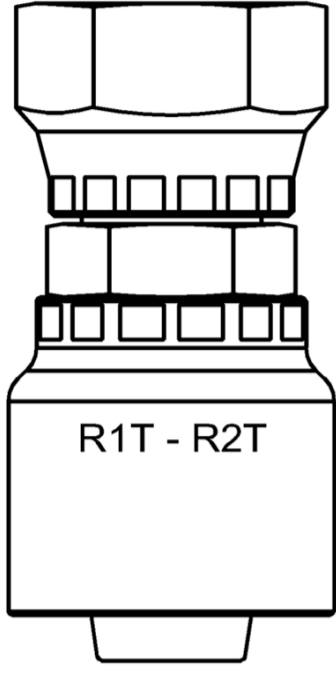




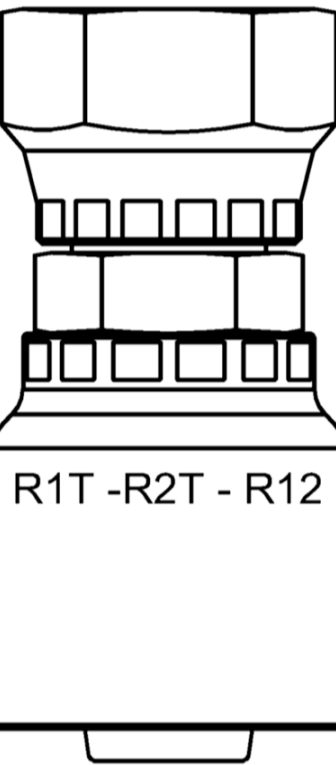






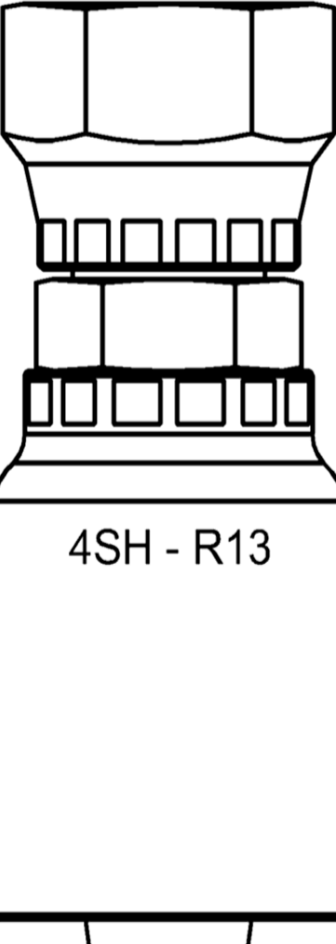





TYPE C122
TOLERANCE ON CRIMPING +/- 0.1 MM

 R1T - R2T	HOSE TYPE	HOSE	HOSE TYPE	1/4" - DN6 (-04)		5/16" - DN8 (-05)		3/8" - DN10 (-06)		1/2" - DN12 (-08)		5/8" - DN16 (-10)		3/4" - DN20 (-12)		1" - DN25 (-16)		1 1/4" - DN32 (-20)		1 1/2" - DN38 (-24)		2" - DN51 (-32)			
				Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp
				FLEXOR 1SN MSHA 1 WIRE BRAID	EN 853 1SN SAE 100 R1AT		20 mm	16.9 mm	20 mm	19.8 mm	21 mm	20.6 mm	26 mm	23.7 mm	28 mm	28.5 mm	32 mm	32.3 mm	39 mm	43.2 mm					
FLEXOR 2SN MSHA 2 WIRE BRAID	EN 853 2SN SAE 100 R2AT		20 mm	17.7 mm	20 mm	20.8 mm	21 mm	21.5 mm	26 mm	24.6 mm	26 mm	29.5 mm	32 mm	33.2 mm	39 mm	44.1 mm									
FLEXOPAK 2 2 WIRE BRAID	EN 857 2SC SAE 100 R16S		20 mm	17.2 mm	20 mm	19.8 mm	21 mm	20.6 mm	26 mm	24.0 mm	26 mm	28.5 mm	32 mm	32.3 mm	39 mm	43.3 mm									
AT3K 2 WIRE BRAID	AT3K-2B											26 mm	28.5 mm	32 mm	32.3 mm	39 mm	43.3 mm								

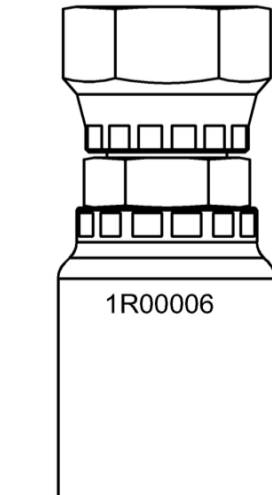


TYPE C124

 R1T - R2T - R12	HOSE TYPE	HOSE	HOSE TYPE	1/4" - DN6 (-04)		5/16" - DN8 (-05)		3/8" - DN10 (-06)		1/2" - DN12 (-08)		5/8" - DN16 (-10)		3/4" - DN20 (-12)		1" - DN25 (-16)		1 1/4" - DN32 (-20)		1 1/2" - DN38 (-24)		2" - DN51 (-32)			
				Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp
				FLEXOR 1SN MSHA 1 WIRE BRAID	EN 853 1SN SAE 100 R1AT											29 mm	30.8 mm	32 mm	35.2 mm	39 mm	43.1 mm	39 mm	50.6 mm	58 mm	56.7 mm
FLEXOR 2SN MSHA 2 WIRE BRAID	EN 853 2SN SAE 100 R2AT							22 mm	24.0 mm	26 mm	27.9 mm	29 mm	31.5 mm	32 mm	35.9 mm	39 mm	43.7 mm	39 mm	52.8 mm	59 mm	59.5 mm	59 mm	72.5 mm		
FLEXOR 12 4 WIRE SPIRAL	EN 856 R12 SAE 100 R12							22 mm	24.4 mm	26 mm	28.5 mm	29 mm	32.7 mm	32 mm	36.3 mm	39 mm	43.9 mm	39 mm	51.5 mm	59 mm	59.4 mm	59 mm	72.6 mm		
AT4K-4S 4 WIRE SPIRAL	AT4K-4S							22 mm	24.4 mm	26 mm	28.5 mm	29 mm	32.7 mm	32 mm	36.3 mm	39 mm	43.9 mm								

TYPE C126

 4SH - R13	HOSE TYPE	HOSE	HOSE TYPE	1/4" - DN6 (-04)		5/16" - DN8 (-05)		3/8" - DN10 (-06)		1/2" - DN12 (-08)		5/8" - DN16 (-10)		3/4" - DN20 (-12)		1" - DN25 (-16)		1 1/4" - DN32 (-20)		1 1/2" - DN38 (-24)		2" - DN51 (-32)			
				Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp
				FLEXOR 12 4 WIRE SPIRAL	EN 856 R12 SAE 100 R12													49 mm	35.9 mm	56mm	43.1mm	84 mm	54.9 mm	75mm	61.6 mm
FLEXOR 13 6 WIRE SPIRAL	EN 856 R13 SAE 100 R13													49 mm	37.3 mm	56mm	43.9mm	84 mm	57.7 mm	75mm	64.2 mm				
AT5K 6 WIRE SPIRAL	AT5K-6S													49 mm	37.3 mm	56mm	43.9mm	84 mm	57.7 mm	75mm	64.2 mm				
FLEXOR 4SH 4 WIRE SPIRAL	EN 856 4SH													49 mm	37.0 mm	56mm	43.9mm	84 mm	53.9 mm	75mm	60.3 mm				
AT5K 4 WIRE SPIRAL	AT5K-4S													49 mm	37.0 mm	56mm	43.9mm	84 mm	53.9 mm						

TYPE C12R

 1R0006	HOSE TYPE	HOSE	HOSE TYPE	1/4" - DN6 (-04)		5/16" - DN8 (-05)		3/8" - DN10 (-06)		1/2" - DN12 (-08)		5/8" - DN16 (-10)		3/4" - DN20 (-12)		1" - DN25 (-16)		1 1/4" - DN32 (-20)		1 1/2" - DN38 (-24)		2" - DN51 (-32)			
				Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp	Length	Crimp
				FLEXOR 13 6 WIRE SPIRAL	EN 856 R13 SAE 100 R13																	66 mm	56.0 mm		
AT5K 6 WIRE SPIRAL	AT5K-6S																	66 mm	56.0 mm			88mm	78.0 mm		